



# Lubricate General Electric Telephone 2-9710A Power Dial

Lubricate power dial component on base logic board.

Written By: Norberto Sanchez



## INTRODUCTION

This guide will show how to lubricate the power dial. Your power dial will operate smooth after completing this guide.

---




### TOOLS:

- [Lubricant](#) (1)
  - [Phillips #1 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Phone Cord



 Unplug the device before proceeding.

- Remove the phone cord from the phone jack from the base of the headset.
- Use a plastic opening tool to remove the phone cord.


## Step 2



- Remove the phone cord screw cap.
  - Unscrew the 7.5mm screw.
- Remove the screw cap.
- Remove the cord from the phone base.




## Step 3 — 9V Base Battery

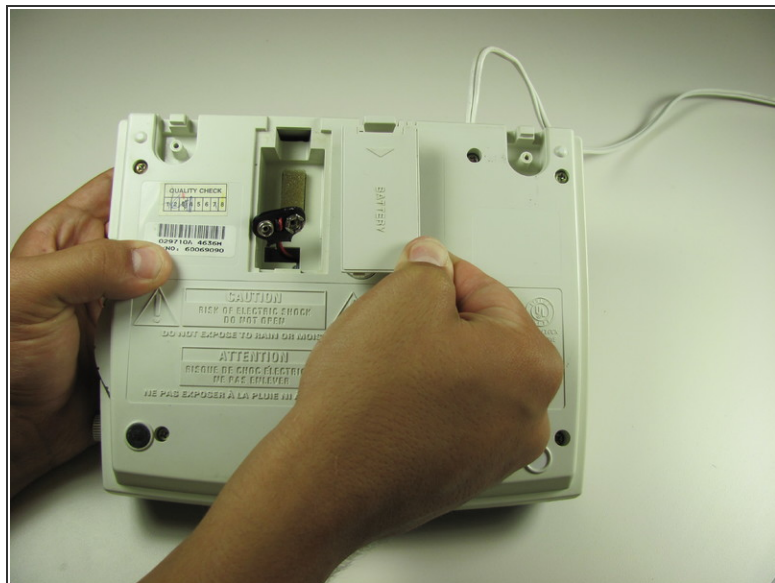


- Use finger to remove the battery cover.

## Step 4 — Base Shell

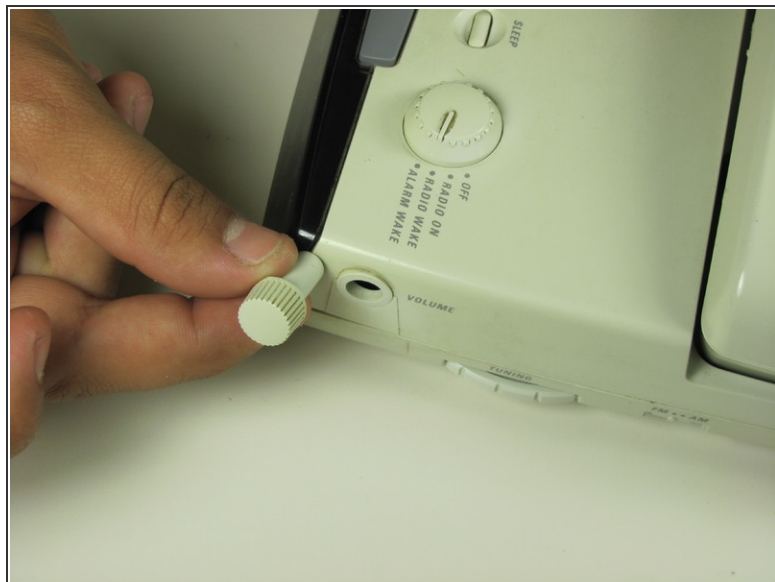

- Remove the Volume Dial by gently grasping the dial and pulling away from the base.

## Step 5

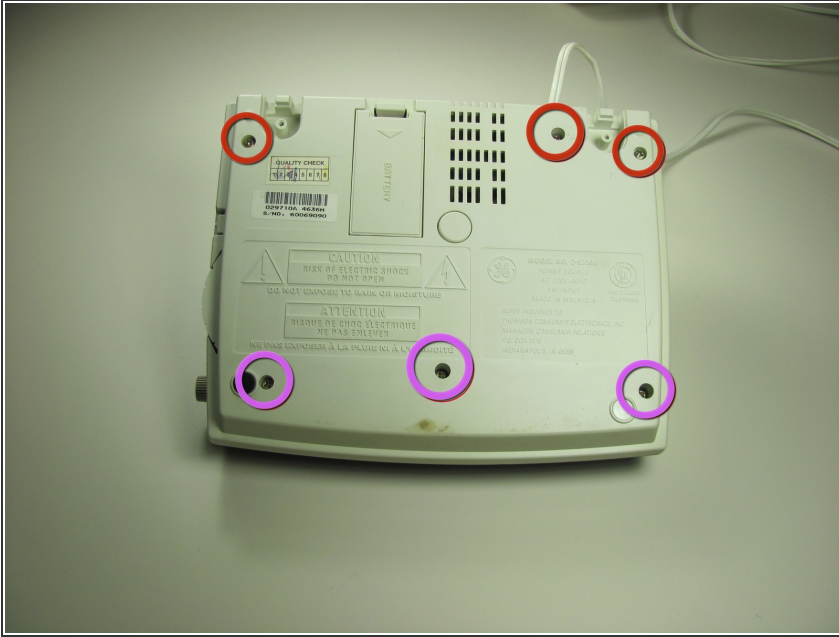


- Remove the 6 screws from the base shell.
- Remove the 3 12mm screws with the Philips head #1 screw driver.
- Remove the 3 18mm screws with the Philips head #1 screw driver.

## Step 6



- Pry off the base shell using a Plastic Opener Tool.

## Step 7 — Lubricate General Electric Telephone 2-9710A Power Dial

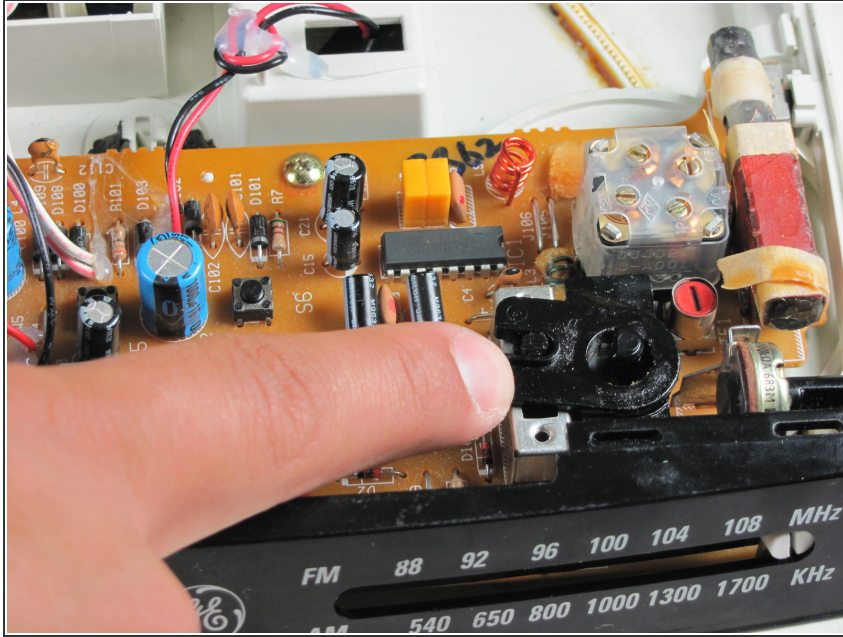

- Inside base shell on circuit board, lubricate power switch.

**⚠ CAUTION:** Make sure lubricant does not circuit board. This can damage the circuit board.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-11-02 02:25:23 AM.